

# REAL VANTAGE

## 公司简介

**亿万达有限公司** 成立于1996年。经过18年不断研究和改进，成功开发了它独特的Xagtec惜德科技，生产了无与伦比的产品：低价位的卓越产品。

独特的Xagtec惜德科技把亿万达的3个特产的效能大幅度提升5倍。亿万达的6个特产：燃油改进剂；机油提升剂；燃油统清洁剂；汽车变速箱油提升剂；CVT变速箱油提升剂和机油，都是高品质；绝对安全；环保；非危害；非易燃；非腐蚀性。

亿万达的座右铭：“利用节省为每个人，全球每个角落制造财富”。这座右铭是一股强大的推动力，推动每个员工不断的努力和决心，持续的研发和改进，生产独一无二的产品，使全球每个角落的人民都受惠。

亿万达的革命性概念：亿万达的产品使用者，无论工业使用者或个人使用者“用得越多，节省越多”。

亿万达以研发和生产原材料（配方）供应厂家和出口商为主要业务，也提供成品包装服务(OEM)给贸易商。

2013年底，亿万达开始生产自己的品牌，Oilxag®品牌的高品质产品，受到高度重视和肯定，获得国际知名保险公司承保全亚洲产品责任险。

## COMPANY INTRODUCTION

*Real Vantage Sdn. Bhd. was incorporated in 1996. After 18 years of continuous research and development, the company developed its unique Xagtec technology to create unrivalled products: superior products with low prices.*

*This most efficient Xagtec technology has enhanced tremendously the company's 6 specialty products, namely Fuel Booster; Engine Oil Booster; ATF Booster; CVT Booster; Fuel System Cleaner and Engine Oil (Synthetic Plus)'s efficiency by 5 times, and all products are superior in quality; absolutely safe; environmental friendly; nonhazardous; nonflammable and noncorrosive.*

*The company's motto "to create wealth through saving for everyone and everywhere in the world". This motto is observed by all staffs of the company and became a strong driving force and strive with untiring determination to research and upgrade company's products continuously, to produce unmatched products to "benefit everyone and everywhere in the world".*

*A revolutionary concept, the company's specialty products ensured all Users, regardless of Industrial Users or Individual Users, "the more you use, the more you save".*

*The company's principal business, research and development; raw materials supply to manufacturers and exporters. The company also provides packaging services (OEM) to traders.*

*End of 2013, the company started to develop its own brand OilXag®. The superior products quality of OilXag® are highly recognized and covered with Asia wide Product Liability Insurance by an international renowned insurance company.*

### MANUFACTURER

**亿万达有限公司**  
**REAL VANTAGE SDN BHD** (378012-P)  
No. 6, Jalan SL 1/12, Bandar Sungai Long,  
43000 Kajang, Selangor.

电话 Tel  
**+603-9010 5288**

电邮 Email  
**info@oilxag.com**

传真 Fax  
**+603-9011 5293**

客户服务热线 Customer Careline  
**+6012-278 3912**


# OILXAG®



# REAL VANTAGE

SDN BHD (378012-P)

# 亿万达有限公司

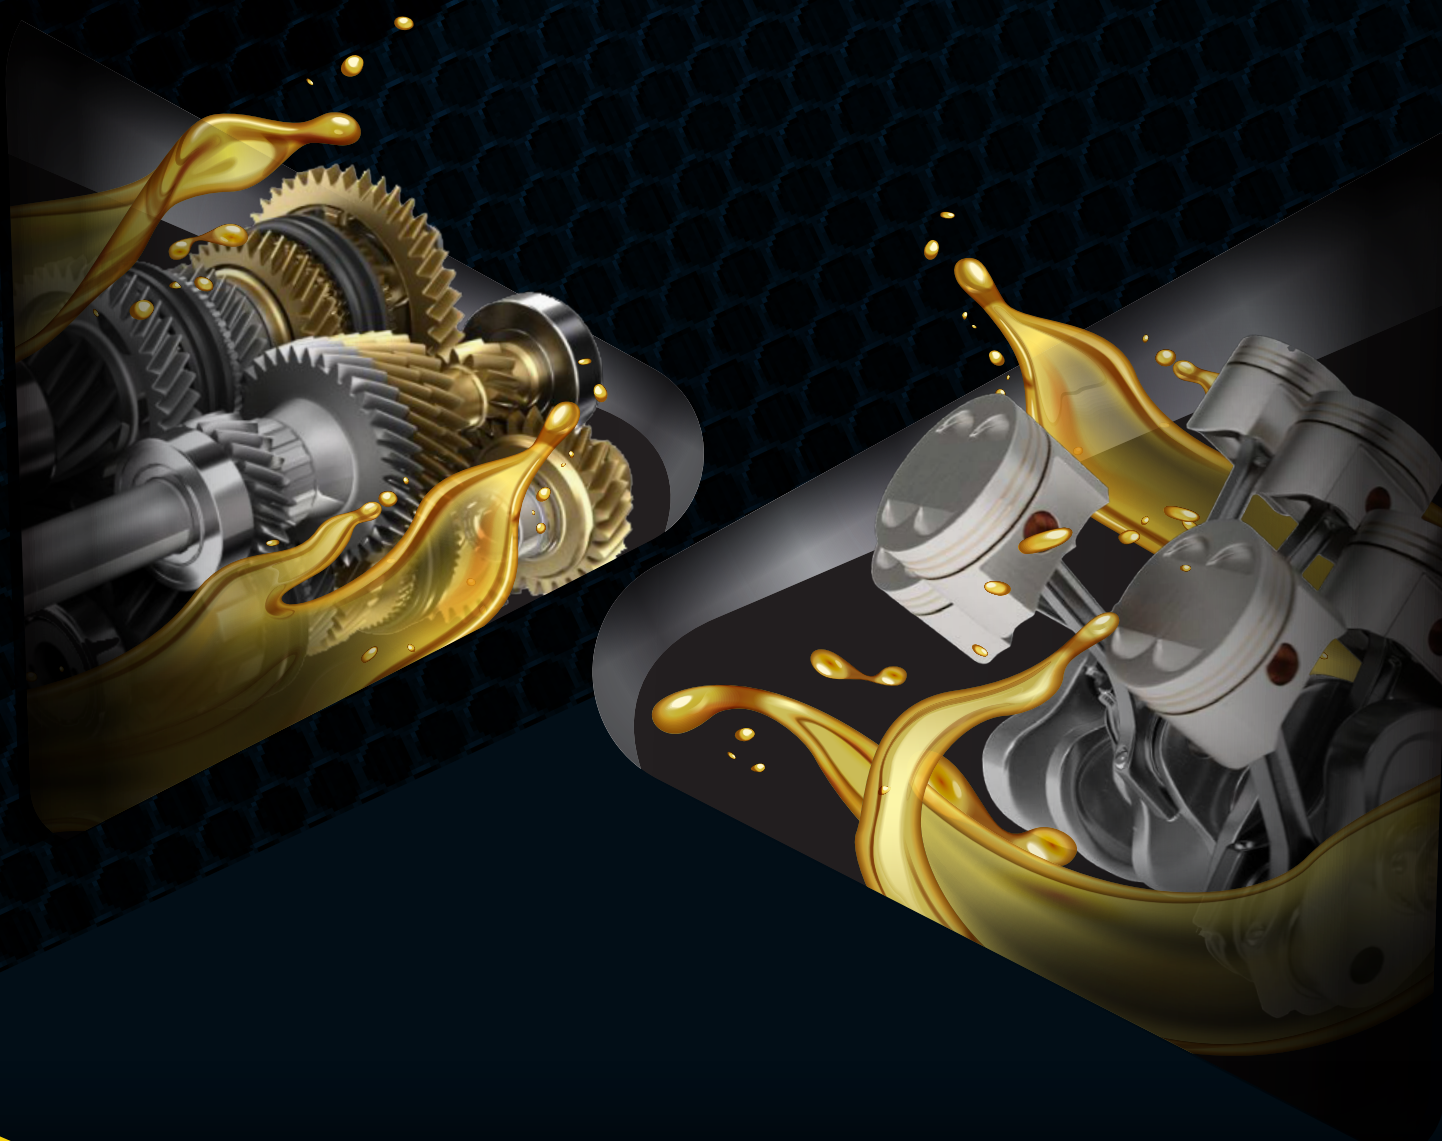

✓ This product is covered by Product Liability Insurance

www.oilxag.com | info@oilxag.com



# FUEL BOOSTER



## 燃油改进剂

高效能燃油改进剂，是采用自创的XagTec惜德科技精炼而成，用量小，效果立竿见影，使用后立刻获得几倍至十倍的回报。

添加后5分钟，可以达到以下的效果：

- 节油**10至40%**
- 提升发动机动力和扭力
- 减少发动机里的积碳和沉淀物
- 润滑发动机机件，减少磨损
- 减少发动机运行中的抖动和噪音
- 稳定怠速机转
- 减少黑烟和废气排放
- 延长发动机使用寿命
- 改善发动机启动功能

使用方式：  
每次加油时，遵照以下的对比，将燃油改进剂添加进油箱里。

- 燃油改进剂为非易燃：非危害；非腐蚀性产品
- 效果立竿见影
- 全亚洲产品责任保险 (美国制裁国家除外)

### 产品规格 SPECIFICATIONS

Flash Point 闪火点 (Cleveland Open Cup)	>132°C
Four Point 流动点	-24°C
Color 颜色	Traslucet Yellow
Odor 气味	Oily
Physical State 物理状态	Liquid
Density 密度	862 kg/m <sup>3</sup> (0.862 g/cm <sup>3</sup> ) @15°C
Solubility 溶解度	Insoluble In Water
LogK <sub>OW</sub> 辛酸水分配系数	This Product Is More Soluble In Octanol; log (octanol/water) >3
Kinematic Viscosity 动力粘度	88 mm <sup>2</sup> /s (87 cSt) @40°C 12 mm <sup>2</sup> /s (12 cSt) @ 100°C

High efficiency Fuel Booster is produced with the latest self - developed Xagtec technology, it requires very small dosage and produces immediate effect, and immediate saving.

With Fuel Booster, the following effects could be achievable within 5 minutes:

- Improves Fuel Efficiency of 10% to 40%
- Boosts Engine Power and Torque
- Cleans Engine Carbon and Other Deposits
- Lubricates Engine Parts, Reduces Friction
- Reduces Engine Vibration and Noisiness
- Stabilizes Revolution During Idling
- Reduces Black Smoke and Toxic Gas Emissions
- Prolong Engine Life Span
- Improves Engine Startability

#### Direction of Use:

Adds Fuel Booster according to the following mixing ratio into each tankful of fuel

- Fuel Booster is Nonflammable; Nonhazardous; and Noncorrosive.
- Immediate Effect Guaranteed.
- Asia wide Product Liability Insurance coverage (US sanctioned countries excluded).

添加对比 Mixing Ratio	节油效果 Achievable Fuel Saving Effect
Petrol 汽油 1ml Fuel Booster : 10 Liter Petrol 1毫升燃油改进剂：10公升汽油	<b>10% - 30%</b>
Diesel 柴油 1ml Fuel Booster : 8 Liter Diesel 1毫升燃油改进剂：8公升柴油	<b>15% - 40%</b>
Diesel Euro5 欧5柴油 1ml Fuel Booster : 16 Liter Euro5 Diesel Oil 1毫升燃油改进剂：16公升欧5柴油	<b>10% - 30%</b>



# ENGINE OIL BOOSTER

## 机油提升剂

采用自创的XagTec惜德独特配方制成，它能快速的降低金属表面的摩擦，大幅度减少磨损。它的卓越润滑功能使发动机机件操作更顺畅，发动机的动力也明显增强。

机油提升剂快速提升机油抗磨力，它也会形成抗摩擦化学薄膜，粘附在发动机内的金属表面，形成高粘度金属保护膜，降低发动机机件磨损。

当发动机停止操作时，发动机内的机油大部分会回流到油箱底部，机件内部会逐渐缺油。干燥。当发动机再启动时因油箱底部的机油有时间循环差，无法同步润滑发动机机件，日久之后，发动机可能严重磨损，降低发动机的性能和寿命。

机油提升剂适合添加于任何种类的机油：矿物机油；半合成机油；全合成机油；汽油/柴油型发动机机油。

使用方式：每次更换机油时以每公升机油添加30至40毫升机油提升剂的比率添加，添加后启动发动机5分钟，可以达到以下效果：

- 提升耐磨力，修复内部磨损机件、提升发动机动力和扭力
- 延长机油更换间隔期（50%）
- 降低发动机温度；噪音和震动卓越发动机在低温下启动
- 节省燃油（3至12%）
- 减少油泥积碳
- 延长发动机使用寿命
- 减少发动机维修

- 机油提升剂为非易燃：非危害；非腐蚀性产品
- 效果立竿见影
- 全亚洲产品责任保险 (美国制裁国家除外)

Formulated with its unique Xagtec technology to reduce friction between metal to metal. The enhanced lubricity "lighten the engine moving parts and increases engine horsepower.

Engine Oil Booster provides boundary protective coating on metal surfaces to reduce friction between metal to metal contact and therefore reduces wear and tear, especially during "Dry Cold Starts".

When engine stops operation, engine oil will flow down to the bottom of oil pan, leaving the metal parts dry, When the engine restart operation, before engine oil circulate from the bottom of oil pan to provide protection, friction between metal to metal contact already occurred, the repeated "Stop & Go" seriously affect the performance of engine moving parts and shorten engine life span.

Engine Oil Booster is compatible with all types of engine oil, mineral; semi-synthetic; fully-synthetic; petrol /diesel powered engine oil.

#### Direction of Use:

Adds 30 - 40ml Engine Oil Booster to every liter engine oil, and restart engine for 5 minutes, the following effects could be achievable:

- Enhances Lubricity
- Boosts Engine Power and Torque
- Extends Oil Change Interval by 50%
- Restores Wear and Tear Engine Parts
- Prolong Engine Life Span
- Excellent Cold Engine Starting Engine Noisiness and Engine Oil Sludge,

- Engine Oil Booster is Nonflammable; Nonhazardous; and Noncorrosive.
- Immediate Effect Guaranteed.
- Asia wide Product Liability Insurance coverage (US sanctioned countries excluded).

### 产品规格 SPECIFICATIONS

Flash Point 闪火点 (Cleveland Open Cup)	>224°C
Four Point 流动点	-27°C
Vapour Pressure 蒸汽压力	<0.5Pa @20°C
Auto-ignition Temperature 自然点	>300°C
Color 颜色	Light Traslucet Yellow
Odor 气味	Oily
Physical State 物理状态	Liquid
Density 密度	1.2g/cm <sup>3</sup> @15°C
Solubility 溶解度	Insoluble In Water
Kinematic Viscosity 动力粘度	100.90 cSt @40°C 14.26 cSt @ 100°C





# BIO FUEL SYSTEM CLEANER

OilXag® 燃油系统清洁剂是一种强大的不易燃配方，可清洁您车辆的整个燃油系统。

- 产品的好处：
- 清洁整个燃油系统
  - 减少黑烟
  - 恢复失去的动力
  - 减少振动和噪音
  - 不易燃、无腐蚀性

使用方式：  
将 75 毫升 OilXag® 燃油系统清洁剂添加到 40 - 60 升汽油/柴油中。 建议每 3,000 - 5,000 公里使用一次。

- 燃油改进剂为非易燃：非危害；非腐蚀性产品
- 效果立竿见影
- 全亚洲产品责任保险 (美国制裁国家除外)

OilXag® Bio Fuel System Cleaner is a powerful, non-flammable formula that cleans out the entire fuel system of your vehicle.

- Cleans Entire Fuel System
- Reduces Black Smoke
- Restores Lost Power
- Reduces Vibration & Noisiness
- Non-flammable & Non-corrosive

**Direction of Use:**  
Adds 75ml OilXag® Fuel System Cleaner to 40 - 60liter Petrol/Diesel. Use of every 3,000 - 5,000 km is recommended.

- Bio Fuel System Booster is Nonflammable; Nonhazardous; and Noncorrosive.
- Immediate Effect Guaranteed.
- Asia wide Product Liability Insurance coverage (US sanctioned countries excluded).



## 产品规格 SPECIFICATIONS

Flash Point 闪火点 (Cleveland Open Cup)	>300°C
Four Point 流动点	0°C
Color 颜色	Pinkish
Odor 气味	Oily
Physical State 物理状态	Liquid
Density 密度	915 kg/m³ (0.915 g/cm³) @15°C
Solubility 溶解度	Insoluble In Water
Kinematic Viscosity 动力粘度	40.05 mm²/s (40.05 cSt) @40°C 8.326 mm²/s (8.326 cSt) @ 100°C

# AUTOMATIC TRANSMISSION FLUID BOOSTER

OilXag® 汽车变速箱油提升剂的配方旨在延长汽车变速箱的使用寿命。该产品的成分有助于溶解污染物、防止油泥和漆膜积聚、将流体恢复到原始状态、防止热分解并改善冷却效果。

- 产品的好处：
- 提升性能
  - 额外保护，延长使用寿命
  - 恢复磨损部件
  - 减少摩擦； 温度； 振动和噪音
  - 确保平稳高效的运行

使用方式：  
适用于高达4升的汽车变速箱油。

- 燃油改进剂为非易燃：非危害；非腐蚀性产品
- 效果立竿见影
- 全亚洲产品责任保险 (美国制裁国家除外)

OilXag® Auto Transmission Fluid Booster is formulated to extend the life of your car's transmission. This product's ingredients help dissolve contaminants, prevent sludge and varnish build-up, restore fluid to its original condition, protect against thermal breakdown and improve cooling.

**Direction of Use:**  
Applicable up to 4 liter ATF

- Boosts Performance
- Extra Protection, Prolong Lifespan
- Restores Wear & Tear Parts
- Reduces Friction; Temperature; Vibration & Noisiness
- Ensures Smooth & Efficient Operation

- Automatic Transmission Fluid Booster is Nonflammable; Nonhazardous; and Noncorrosive.
- Immediate Effect Guaranteed.
- Asia wide Product Liability Insurance coverage (US sanctioned countries excluded).



## 产品规格 SPECIFICATIONS

Flash Point 闪火点 (Cleveland Open Cup)	>220°C
Four Point 流动点	-42°C
Vapour Pressure 蒸汽压力	<0.5Pa @20°C
Auto-ignition Temperature 自然点	>300°C
Color 颜色	Reddish
Odor 气味	Oily
Physical State 物理状态	Liquid
Density 密度	848 kg/m³ (0.848 g/cm³) @15°C
Solubility 溶解度	Insoluble In Water
Kinematic Viscosity 动力粘度	32.73 mm²/s (32.73 cSt) @40°C 6 mm²/s (6 cSt) @ 100°C



# CVT FLUID BOOSTER

将您的车辆提升到新的动力水平。将 OilXag® CVT变速箱油提升剂添加到您的 CVT 流体中，以恢复失去的动力、提高加速和燃油效率。

产品的好处：

- 提升性能
- 额外保护，延长使用寿命
- 恢复磨损部件
- 减少摩擦； 温度; 振动和噪音
- 确保平稳高效的运行

使用方式：

适用于4升CVT油液

- CVT变速箱油提升剂改进剂为非易燃：非危害；非腐蚀性产品
- 效果立竿见影
- 全亚洲产品责任保险 (美国制裁国家除外)

Take your vehicle to the next level of power. Add the OilXag® CVT Fluid Booster to your CVT fluid to restore lost power, improve acceleration and fuel efficiency.

- Boosts Performance
- Extra Protection, Prolong Lifespan
- Restores Wear & Tear Parts
- Reduces Friction; Temperature; Vibration & Noisiness
- Ensures Smooth & Efficient Operation

Direction of Use:

Applicable up to 4 liter CVT Fluid

- CVT Fluid Booster is Nonflammable; Nonhazardous; and Noncorrosive.
- Immediate Effect Guaranteed.
- Asia wide Product Liability Insurance coverage (US sanctioned countries excluded).



## 产品规格 SPECIFICATIONS

Flash Point 闪火点 (Cleveland Open Cup)	>224°C
Four Point 流动点	-27°C
Vapour Pressure 蒸汽压力	<0.5Pa @20°C
Auto-ignition Temperature 自然点	>300°C
Color 颜色	Light Blue
Odor 气味	Oily
Physical State 物理状态	Liquid
Density 密度	1.2g/cm³ @15°C
Solubility 溶解度	Insoluble In Water
Kinematic Viscosity 动力粘度	100.90 cSt @40°C 14.26 cSt @ 100°C

# SYNTHETIC PLUS

## API SN/CF MOTOR OIL

OilXag® 5W30 / 10W40 机油是一种独特的技术配方，可为您的车辆发动机提供保护和最佳性能。它是由Xagtec配方制成的，可减少发动机磨损，修复汽车零件并延长发动机使用寿命。

高性能机油

汽油和柴油发动机的额外保护

产品的好处：

- 25000 公里全程超强保护Xagtec配方
- 保护发动机，减少抛锚，减少故障停机（50% 至80%）
- 延长发动机寿命（50% 至100%）
- 修复磨损机件，减少维修保养费用（50% 以上）
- 节省燃油（3% 至8%）
- 增强发动机动力和扭力（3%至10%）
- 减少发动机抖动；噪音和温度（25% 以上）
- 减少冷启动机件磨损（90% 以上），机件磨损高达60%是冷启动造成的
- 减尾气排放（3% 至8%）

- 效果立竿见影
- 全亚洲产品责任保险 (美国制裁国家除外)

SPECIFICATIONS:

## API SN/CF ILSAC GF-5 ACES A3/B4-10

### 产品规格 SPECIFICATIONS

Flash Point 闪火点 (Cleveland Open Cup)	>220°C
Four Point 流动点	-33°C
Vapour Pressure 蒸汽压力	<0.5Pa @20°C
Auto-ignition Temperature 自然点	>300°C
Flammability 可燃性	Not Flammable (GHS), C2Combustion (AS 1940)
Flammables Limits 易燃极限	Not Available
Color 颜色	Clear Amber
Odor 气味	Characteristic Mineral Oil
Physical State 物理状态	Liquid
Density 密度	0.852 g/cm³ @15°C
Solubility 溶解度	Insoluble In Water
Kinematic Viscosity 动力粘度	67.26 cSt @40°C 11.50 cSt @ 100°C

OilXag® Synthetic Plus Motor Oil 5W30 / 10W40 is a unique technological formulation that provides protection and optimum performance to your vehicle's engine. It's is made from Xagtec formula that reduce engine wear and tear, restores automotive parts and lengthens engine lifespan.

- 20,000 km extra protection with unique Xagtec formula
- Protects Engine, Reduces Breakdown and Downtime (50% to 80%)
- Prolongs Engine Lifespan (50% to 100%)
- Restores Wear and Tear Parts, Reduces Maintenance cost (>50%)
- Saves Fuel (3% to 8%)
- Improves power and torque (3% to 10%)
- Reduces Engine Vibration, Noisiness and Temperature (>25%)
- Reduces Wear and Tear during “Dry Cold Start” (>90%); More than 60% of engine Wear and Tear occurred during Cold Start
- Reduces Emission (3% to 8%)

- Immediate Effect Guaranteed.
- Asia wide Product Liability Insurance coverage (US sanctioned countries excluded).

## HIGH PERFORMANCE MOTOR OIL

MEETS & EXCEEDS SN/CF SPECIFICATION

EXTRA PROTECTION FOR  
GASOLINE & DIESEL ENGINES

